

CelXrocker[®]

Your Benchtop Versatile Cell Culture Rocker

- ▶ *Tide Motion via adjustable tilt delay (0-60 sec)*
- ▶ *External HMI control box*
- ▶ *Adjustable rocking speed as low as 1 rpm to 20 rpm*




CelXrocker[®] provides gentle side to side rocking motion for mixing in culture flasks, tubes, and dishes. The rocker is designed to conveniently fit in most CO₂ incubators and refrigerators thereby enabling flexible set-ups and assays to be performed in controlled environments.

For small scale culture, the rocker mimics the Tide Motion as a proof of concept for Top holding time (nutrient exchange phase) and Bottom holding time (aeration phase).

Additional Features

- **Nonstop operation without overheating**
Space between motor and platform prevents heat build up in the rocker. Prevents damage of cells/ cell death with trapped heat at the surface of platform
- **Non-slip platform surface**
Keeps the items in place while rocking
- **Time or untimed operation**
Gives the user control over monitoring of mixing period
- **Tide or continuous mode**
Allows option for with or without delays at the end of each tilt
 - **Manipulation through the control box**
Allows monitoring and adjustments on a separate platform from the rocker
 - **User-friendly interface**
Displays your process in real-time
 - **Magnetic control box base**
Allows placement of the control box on any metallic surface. Easily place on the side of the CO₂ incubator

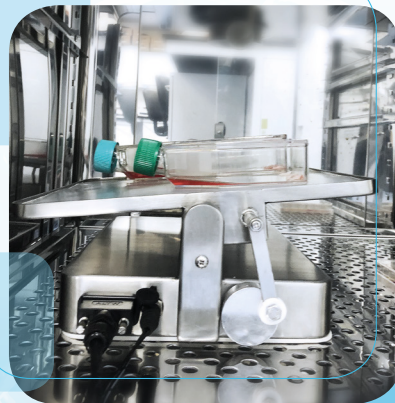



APPLICATIONS

- Tide motion testing of BioNOC II® carriers (Proof-of-concept)
- Small-scale cell culture using macrocarriers
- Assays requiring side-to-side rocking mechanism
- Blotting, hybridization, staining, and destaining

SPECIFICATIONS

CelXrocker™	
Description	2D rocker
Overall dimension (WxDxH)	300 mm x 280 mm x 116.5 mm (platform at 0°) 300 mm x 280 mm x 163 mm (platform at 20°)
Motor type	DC motor
Shaking motion	Rocking
Speed range	1-30 rpm
Tilt angle	± 20 degrees
Platform size (WxD)	300 mm x 280 mm
Platform mat	Non-slip silicone gasket
Max load capacity with platform	13 kg
Electrical requirements	100-240V, AC, 1Phase , 50/60Hz, 3 ampere
Operation type	Continuous or Tide
Experiment time	Infinite or timed
Body	Stainless steel (AISI304 grade)

ORDERING INFORMATION

Product	Model	Item Code	Description
CelXrocker	CXR-1-280X300-C	2231015	Tide 2D rocker, corded power supply
Motor	EQR/EL-DC MOTOR, 12VDC	1620675	Brushless DC planetary gear motor

Note: Spare motor is recommended when purchasing the unit as motor life only lasts for 1 year. Remaining motor life span is shown on the HMI home screen of the control box.

ESCO
VACCIXCELL
 ADHERENT BIOPROCESSING SPECIALIST

For queries and comments, please contact
 Esco VacciXcell Technical Support team.

21 Changi South Street 1 • Singapore 486777
 Tel +65 6251 9361 • mail@vaccixcell.com
 www.escovaccixcell.com